


EXIT AIR TEMPERATURE : 27°C
HUMIDITY: 90%
AIR FLOW RATE: 200 m³/h
RECOVERY PER HOUR: 3,75 kWh
 (VALUES CALCULATED ON THE BASE OF THE SHORTEST CYCLE)

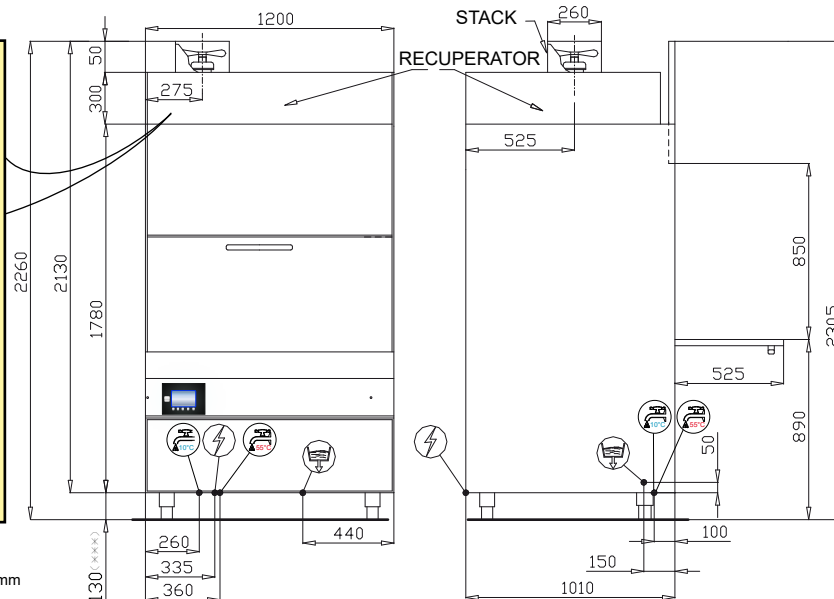

Trays load capacity :
 -8 gn 1/1 max depth 65mm
 -4 gn 1/1 max depth 300mm
 -4 gn 2/1 max depth 65mm
 -2 gn 2/1 max depth 300mm

- HOT WATER CONNECTION 3/4" GAS MAX 55°C**
- COLD WATER CONNECTION 3/4" GAS 10°C**
- DRAIN PIPE Ø 32mm**
- ELECTRICAL SUPPLY**

(***) min 130 max 180 mm

TECHNICAL DATA	
EXTERNAL DIMENSIONS	
width	1200 mm
depth	1010 mm
height	2260/2305(open door) mm
WEIGHT(basic version)	350 kg
VOLTAGE	400V 3N 50Hz
POWER REQUIRED	12975 W
WATER HARDNESS	< 8 °F
WATER CONDUCTIVITY	> 200 µS/cm
INLET WATER PRESSURE	200-400 kPa
CROCKERY DIMENSIONS	
trays max. height	830 mm
RACKS	max 3X(600X800Xh50) mm
RACK DIMENSIONS	Ø850mm-h350mm
RACK EQUIPMENT	1X(96601+96604+96100+96102+96103+96104+96105)+4X96602+3X96603
WASHING CYCLES water/granules(Min)	1/2(5) 3/4(7) 5/6(9) 7/8(11) 9/10(13) 11/12(16)
WATER SUPPLY 55°C	
racks/h(*) ⁽¹⁾	- - - - - -
WATER SUPPLY 15°C	
racks/h(*) ⁽¹⁾	12 8,5 6,5 5,5 4,5 3,5
WATER CONSUMPTION / CYCLE	5.5 L
BOILER CAPACITY	20 L
BOILER HEATING ELEMENT	9000 W
RINSING TEMPERATURE (SET)	85°C
TANK CAPACITY	120 L
TANK HEATING ELEMENT	9000 W
TANK TEMPERATURE (SET)	55°C
WASHING PUMP POWER	3780 W (900 L/min ^{***})
RINSING PUMP POWER	250 W (150 L/min ^{***})
OPERATING NOISE	79 dB(A)

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

⁽¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.